

Hughes 9350 BGAN Mobile Satellite Terminal

HUGHES

Broadband satellite IP terminal and WLAN (Wi-Fi Hot Spot) access point

inmarsat

Imagine connecting at IP broadband speeds of up to 400+ kbps uncompressed Internet access and voice while on the move—with a complete mobile communications package including a small interior modem and exterior auto-tracking antenna. That's exactly what you receive with the breakthrough Hughes 9350 mobile satellite terminal. The 9350 terminal is available with two antenna choices: the C10 and C11. For the highest performance available over the BGAN network, choose the 9350-C10 solution. For applications that benefit from a more compact antenna, choose the 9350-C11 solution. Either way, the Hughes 9350 offers reliable connectivity on the move for the most demanding environments.

The Hughes 9350 is ideal for emergency responders, reporters, and mobile workers who need reliable, high-speed connectivity on the move, such as:

- First responders and public safety workers
- Mobile healthcare technicians (telemedicine)
- Corporate disaster planners
- Field personnel



Collaborate with staff back at headquarters using video, voice, and data simultaneously. It's an instant wireless hot spot for team members on the scene using the built-in Wi-Fi Access Point.

The Hughes 9350 is IP based and offers selectable, dedicated Quality of Service levels (QoS). Easy to install on any vehicle—the tracking antennas use a single cable connection and are available with a magnetic roof mount.

The Hughes 9350 allows you to send and receive IP packet data via Ethernet and WLAN interfaces in a land-vehicular application. In parallel with the packet data services, the same terminal supports a circuit switched voice call or a 64 kbps ISDN data call.



Hughes 9350 BGAN Mobile Satellite Terminal

Key features:

Fully-autonomous tracking antenna acquires and tracks the BGAN satellite signal while on the move

Easy antenna installation on vehicle roof

Includes RF cable and power cable for vehicular installation

Up to 400+ kbps shared data rate and 256 kbps streaming IP data rate*

Auto context activation feature allows PDP contexts to be activated without user action

Internal Web MMI for configuration and control without the use of LaunchPad

Web MMI is accessible via Wi-Fi-enabled PDAs, Blackberrys, and iPhones

Main features:

ISDN bearer capabilities: speech (4 kbps), 3.1 k audio (64 kbps), ISDN data (64 kbps)

Allows simultaneous use of all interfaces (RJ-11, Ethernet, ISDN, USB, and WLAN)

WLAN access point

Two RJ-11 ports; one for voice and fax

Power over Ethernet (PoE) port

Multi-user capability (up to 11 simultaneous sessions)

Selectable Quality of Service:

(32 kbps, 64 kbps, 128 kbps, or 256 kbps*)

Video Streaming:

VideoMover: Windows Media templates

Video Conferencing:

ChaserView :Custom Codec designed for wireless IP

Package includes:

Tracking antenna: C10 or C11

Eight meter RF cable from 9350 modem to antenna

Note:

The maximum loss must be less than 10 dB at 1.6 GHz.

Hughes 9350 Mobile Satellite Terminal

DC-to-DC power cord

Optional cigarette lighter power cord

*Data rate performance can vary depending upon moving conditions and obstruction of satellite signal; 256 kbps streaming on C10 version only; elevation angles >45 degrees.

Prices:

Hardware only: \$14,500 USD

Air time: \$6.95 per MB, 128k Streaming: \$10.95 per min, 256k Streaming: \$14.95 per minute.

Turn Key system: \$19,735

Complete vehicular installation

Modern Notebook PC loaded with VideoMover streaming software and ChaserView two-way video/audio conferencing software, 1 year warranty (parts and labor), air time is not included.


Technical Specifications

Terminal

Weight:	2.8 Kg
Dimensions:	260 mm x 256 mm x 50 mm
Humidity:	95% RH at 40° C
Temperature:	-25° C to +55° C
Power:	Idle: 20 W Max: 65 W (when transmitting)
Input Voltage:	12 VDC or 24 VDC systems
Water and Dust:	IP-54

Antenna

Weight:	C10: 5.5 Kg C11: 1.9 Kg
Dimensions:	C10: 494 mm Dia x 152 mm High C11: 252 mm Dia x 119 mm High
Humidity:	95% RH at 40° C
Temperature:	-25° C to +55° C operating -25° C to +80° C survival
Wind:	125 mph (200 km/h) Exception for magnetic mount: 100 mph (160 km/h)
Water and Dust:	IP-56 antenna

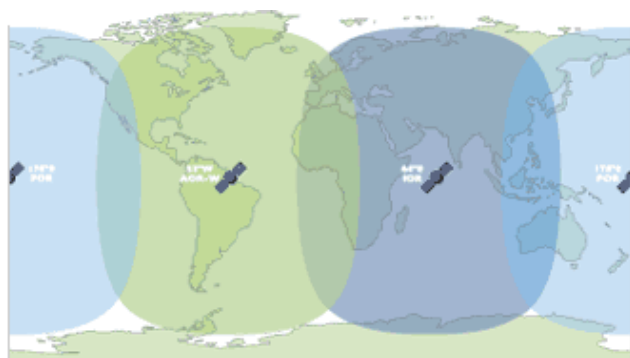

■ F1 1-4 satellite ■ F2 1-4 satellite ■ F3 1-4 satellite
(To be determined)

www.ipixel.com

Contact: Mansour Ansari
(405)-414-7791
<http://www.ipixel.com>